



SmartTM
Online

qsmartonline.com

QEye & QShooter

APP User Guide




Model

QES-200 / QE-100 / QS-100

Overview

Main Menu

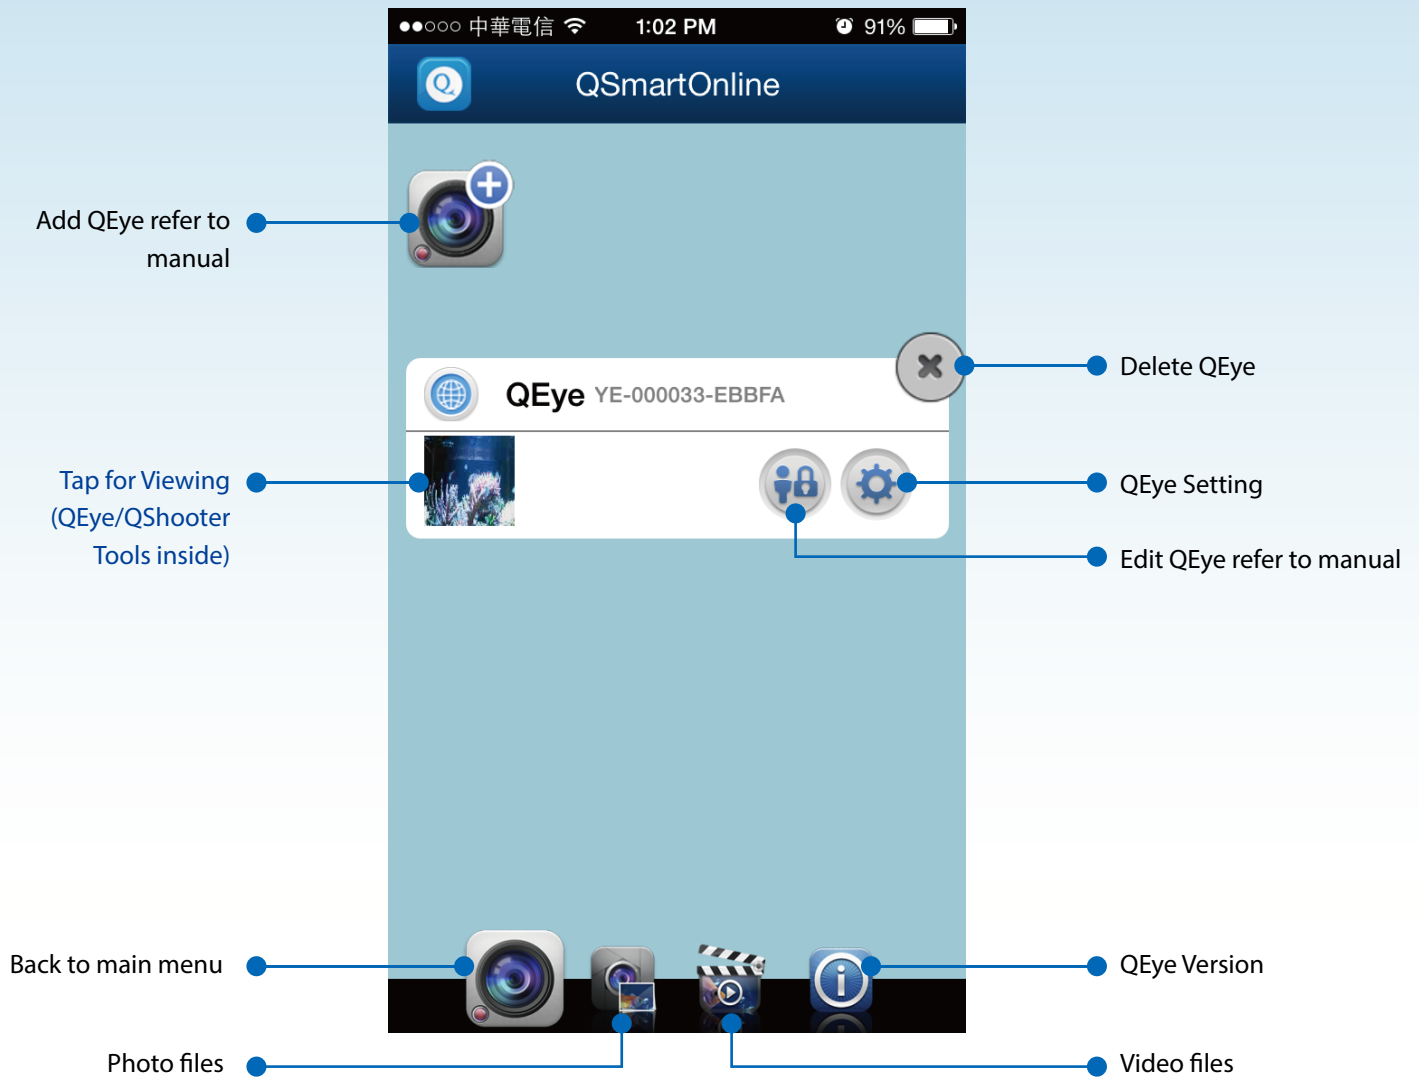

First Screen with Shooting Selection



Overview

Power	Power Mode	
Weak	Small	
Middle	Middle	
Strong	Large	
Weak to Strong	Increasing Mode	
Strong to Weak	Decreasing Mode	
Random	Random	

Number

Shoot

Tap to Second Screen with QShooter / QEye Tools




Tap to Full Screen




QShooter Tools

Tap  to set QShooter Tools

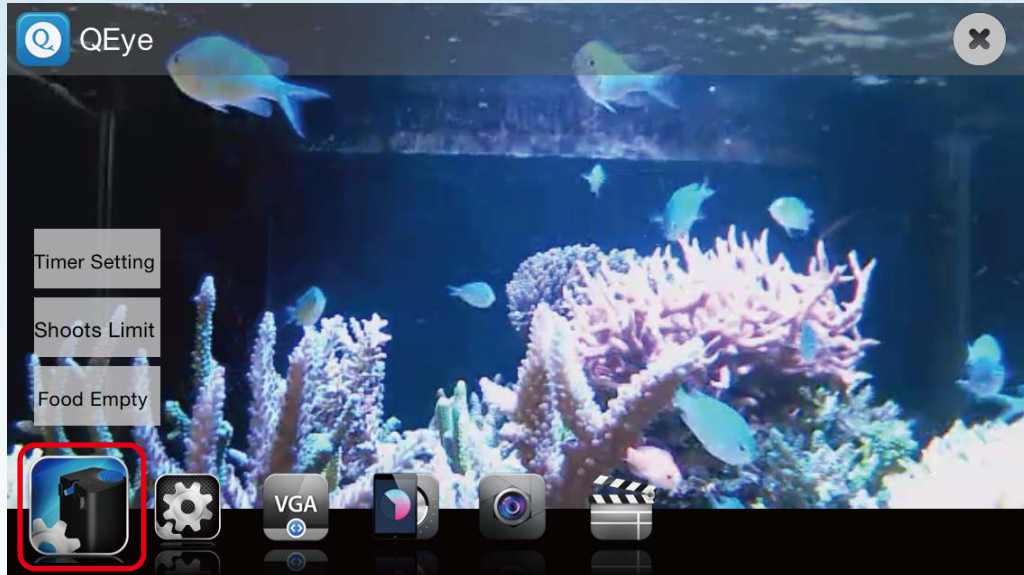


1. Timer Setting

I. Tap Timer Setting

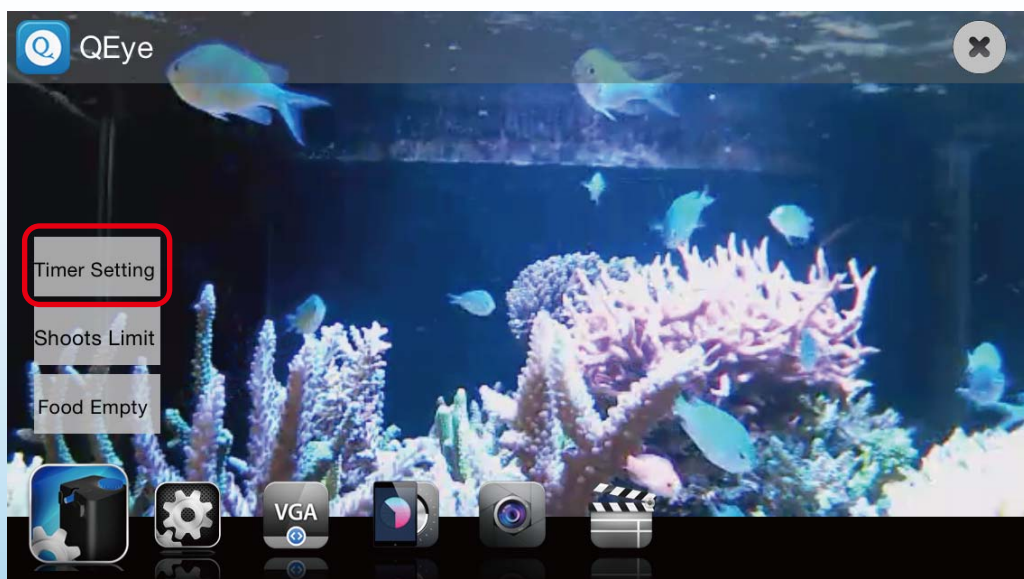


QShooter Tools


II. Tap to set feeding time & shoots
(* 3 sets of timer setting at most)

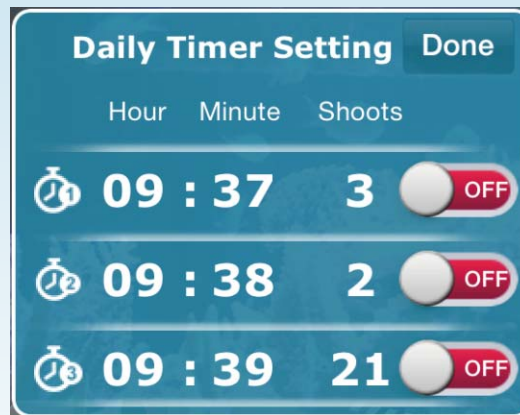

III. Set feeding time & shoots and tap save

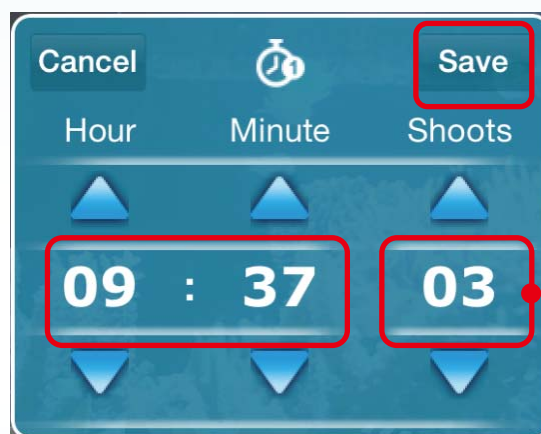


IV. Remember to turn on and tap done

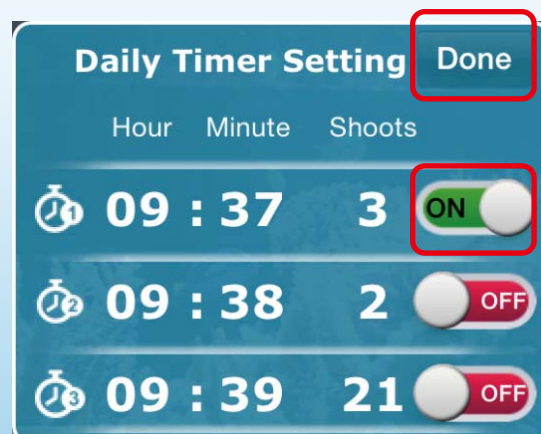

QShooter Tools


2. Shoots Limit

I. Tap Shoots Limit

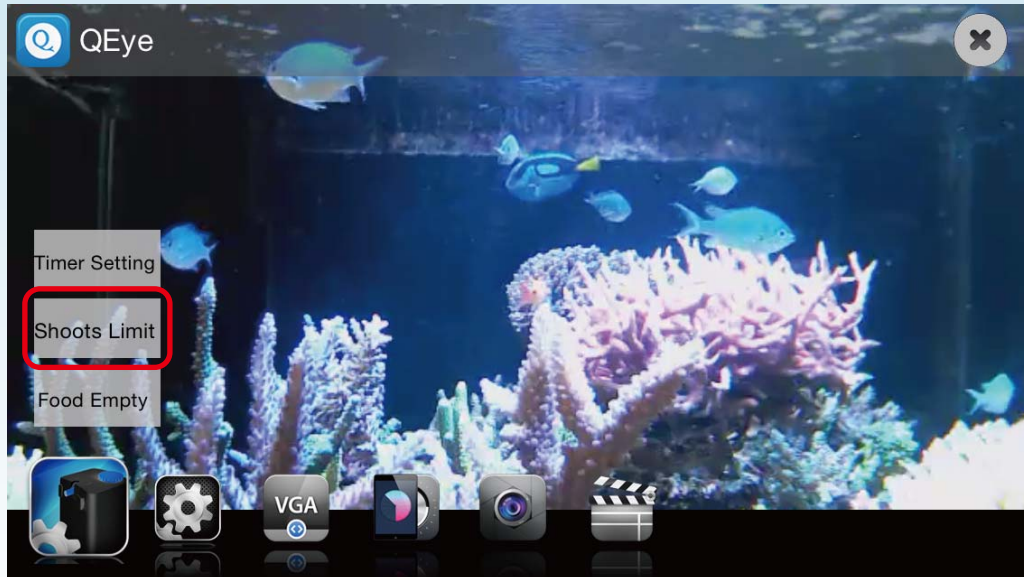

II. Set shoots limit

(* Counts of the daily shoots limit resets automatically at 12:00 a.m. every day)

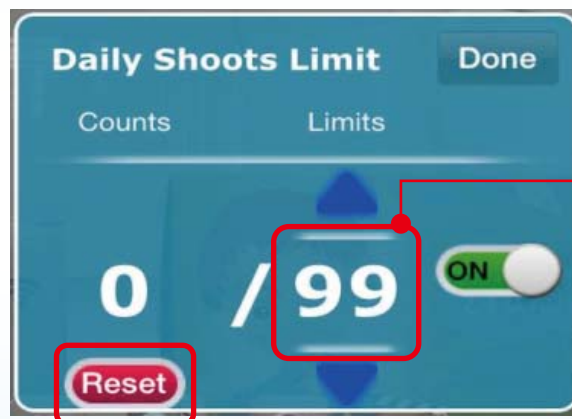


- Tap reset manually to modify the shoots limit
- Tap reset manually and set shoots limit again when it is over shoots limit
(* LED Keeps flashing slowly if it is over shoots limit)



QShooter Tools

III. Remember to turn on and tap done

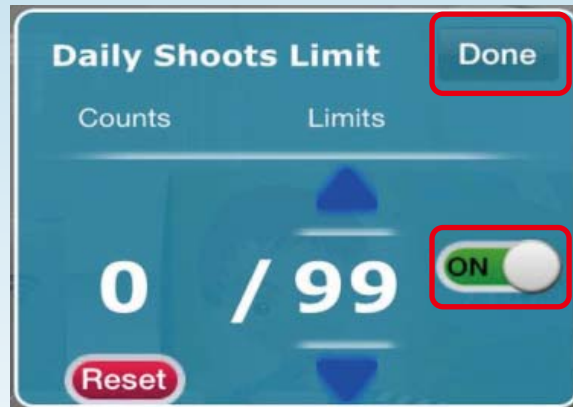

3. Food Empty Alarm

I. Turn alarm on and tap done



- Add pellets to QShooter and tap reset menu when there are no pellets.
(* LED flashing quickly if there are no pellets)




QEye Tools

1.Streaming Quality

I. Tap




to change streaming quality

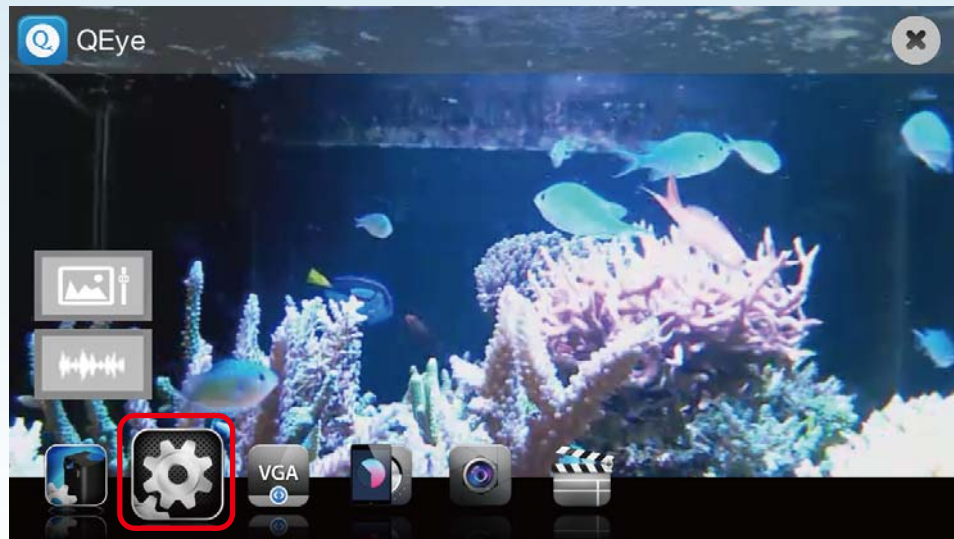

II. Tap




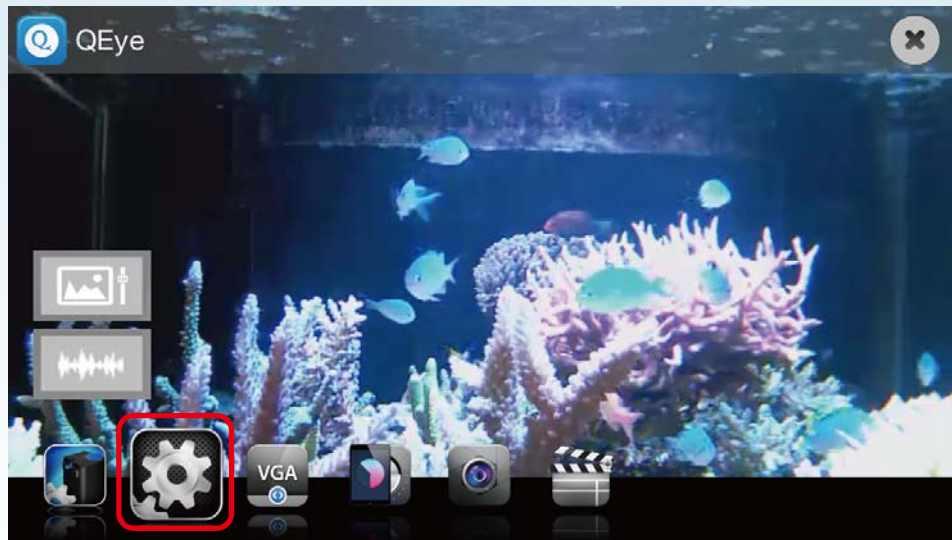
to change

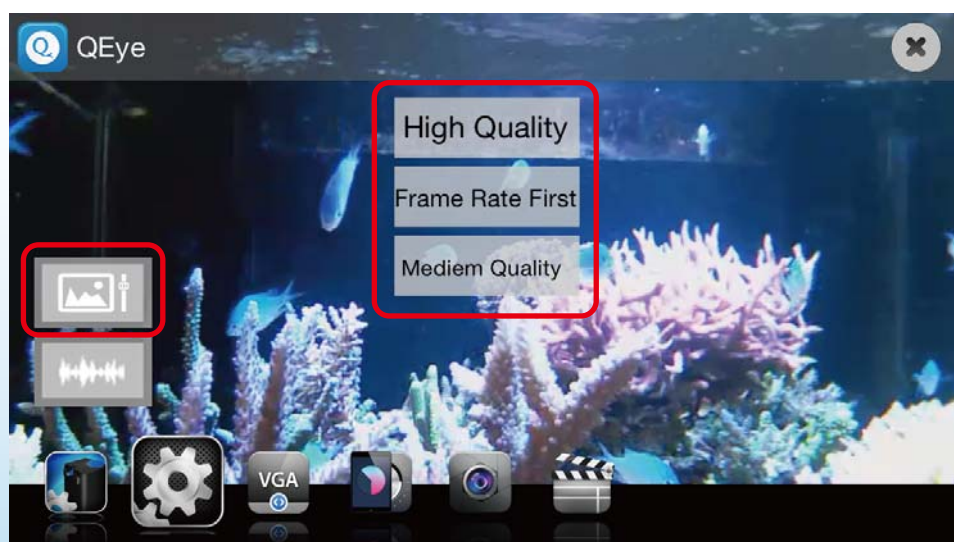


QEye Tools

2.Frequency of AC Electricity

I. Tap  to change frequency of AC electricity




II. Tap  to change

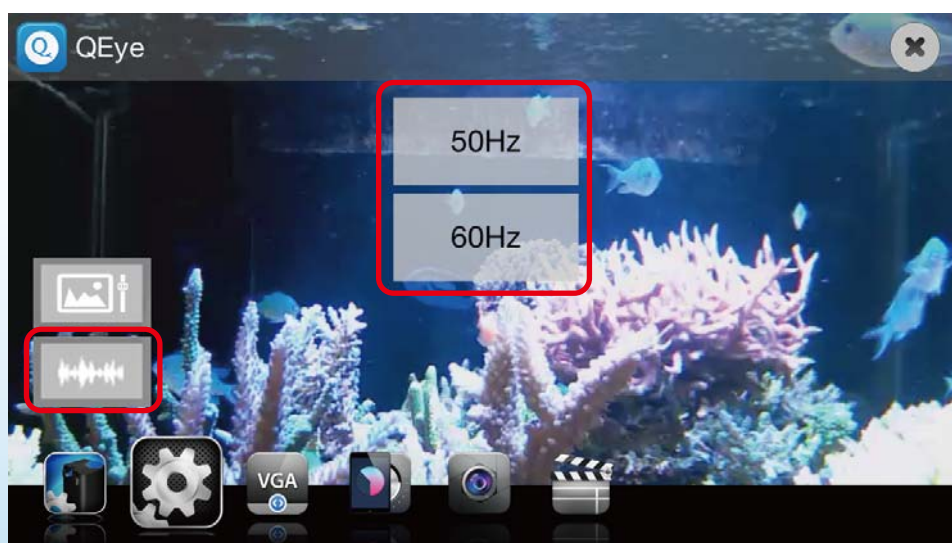

QEye Tools

3. Resolutions

Tap  to change



(HD) 1280 x 720




640 x 480



320 x 240

4. Brightness Contrast

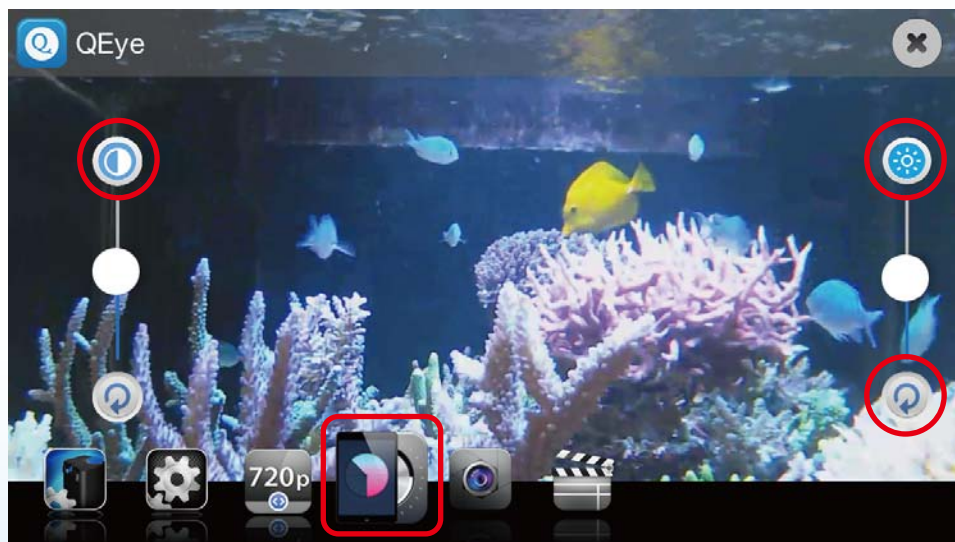

Contrast Control



Brightness Control



Redo


QEye Tools

5. Snapshot

I. Tap



to take a picture

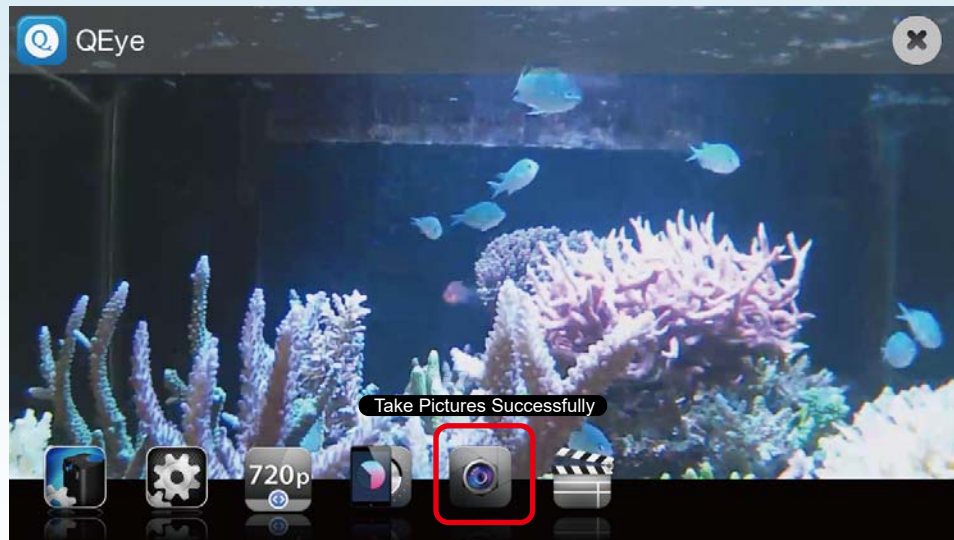


6. Video Recording

I. Tap



to record a video

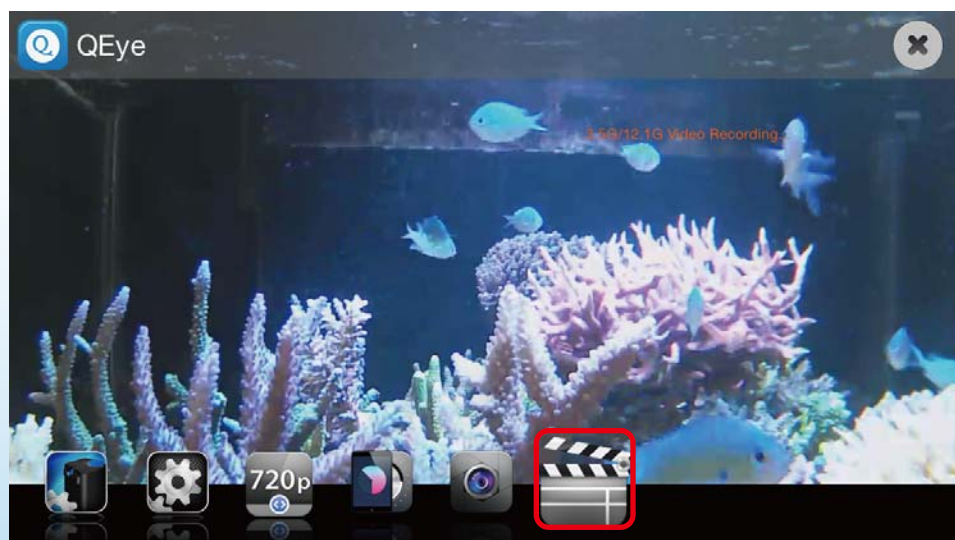


II. Tap




again to stop and save a video

QEye Tools

* Tap  to go back to main menu

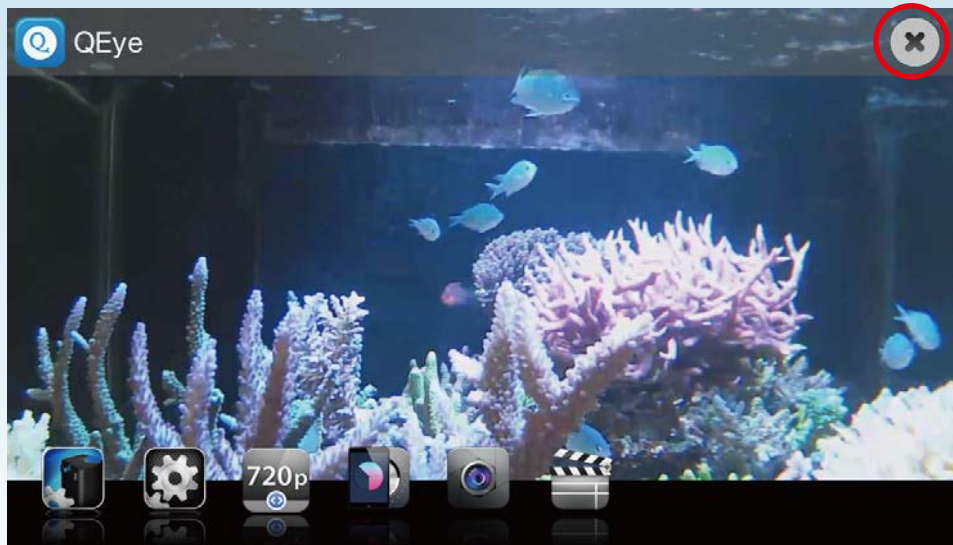

Main Menu

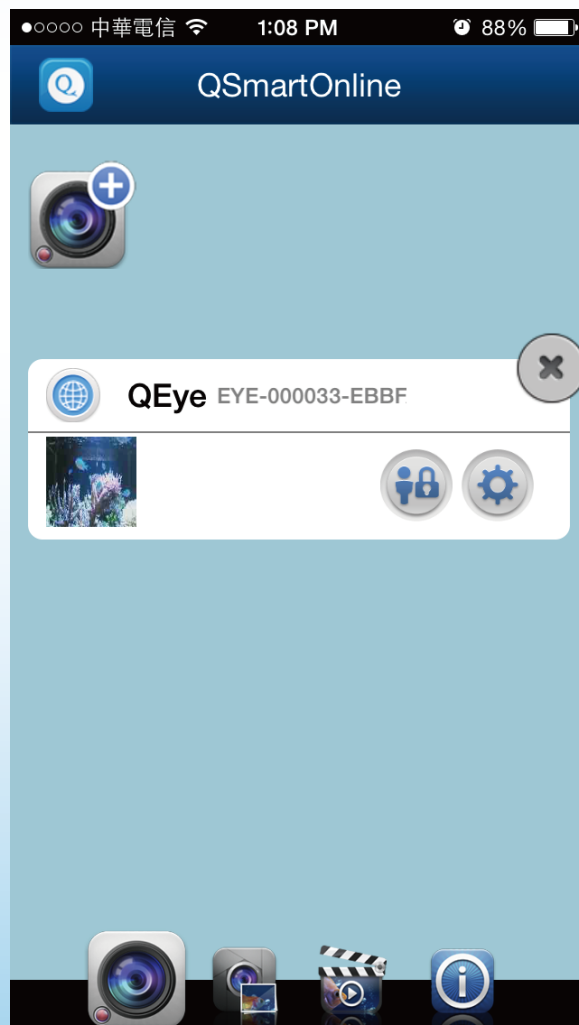


Editing QEye setting

Tap




to go to QEye setting

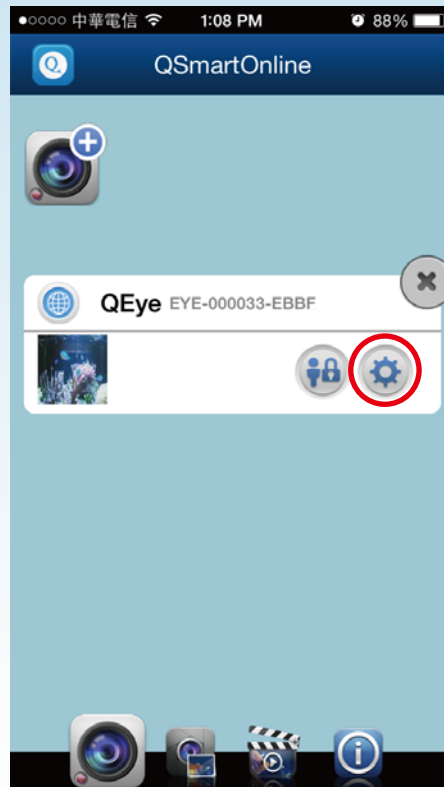

1. WiFi Setting

I. Tap to change WiFi router


* Need to redo QEye installation once WiFi router is changed.

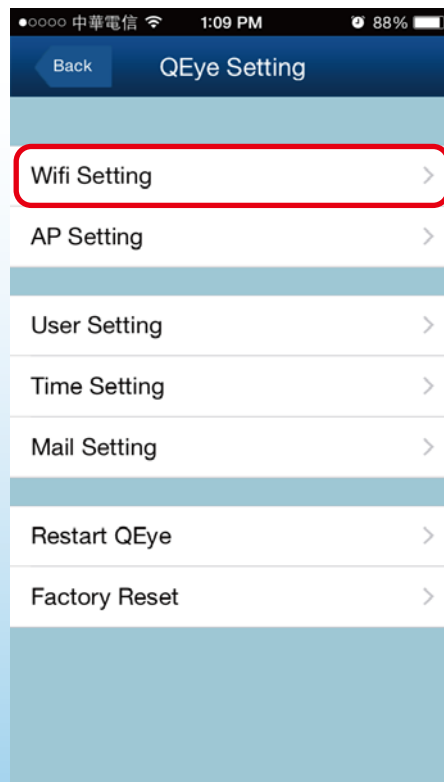

Editing QEye setting


II. Select any other WiFi router

* Need to redo QEye installation once WiFi router is changed.

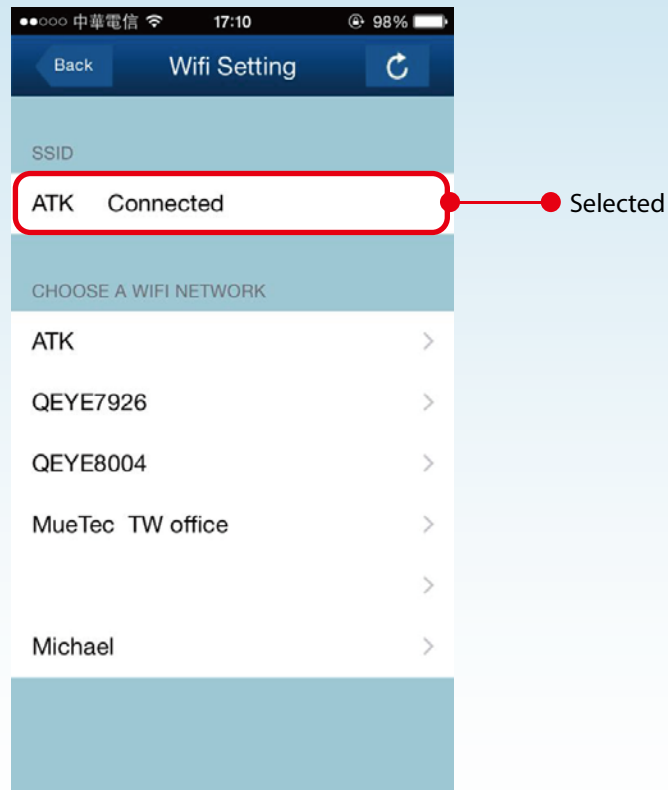


2. AP Setting

I. Tap to change AP information

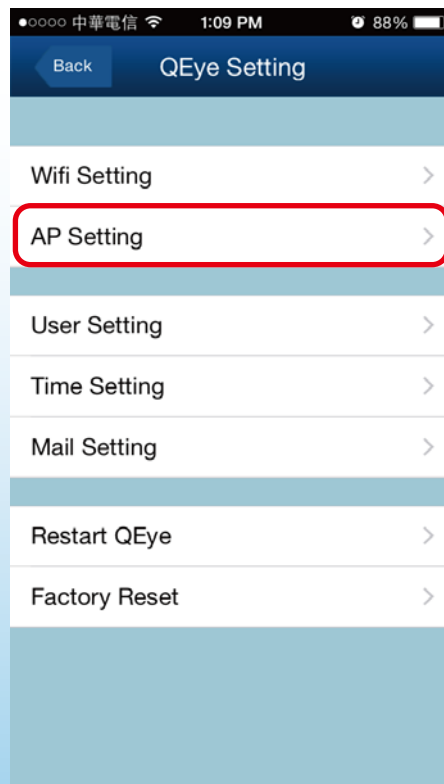

Editing QEye setting


II. Create your SSID & password and tap done

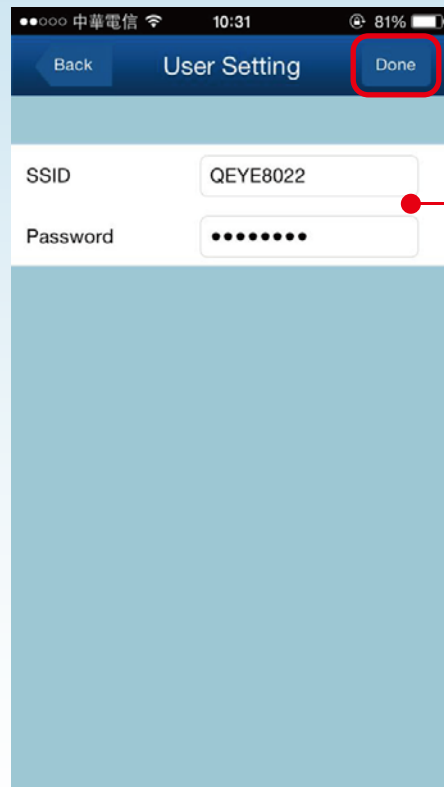

Default setting :
SSID : QEYE * * * *
Password : 12345678


3. User Setting (User Management)

I. Tap to set user setting

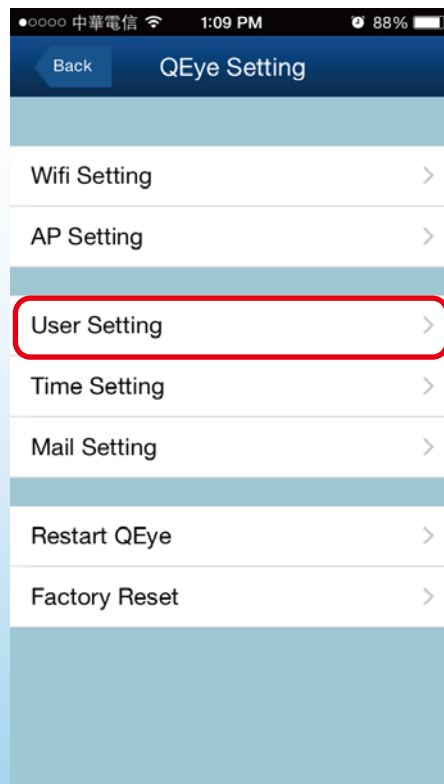

Editing QEye setting

I. Set user name & password for user levels and tap done

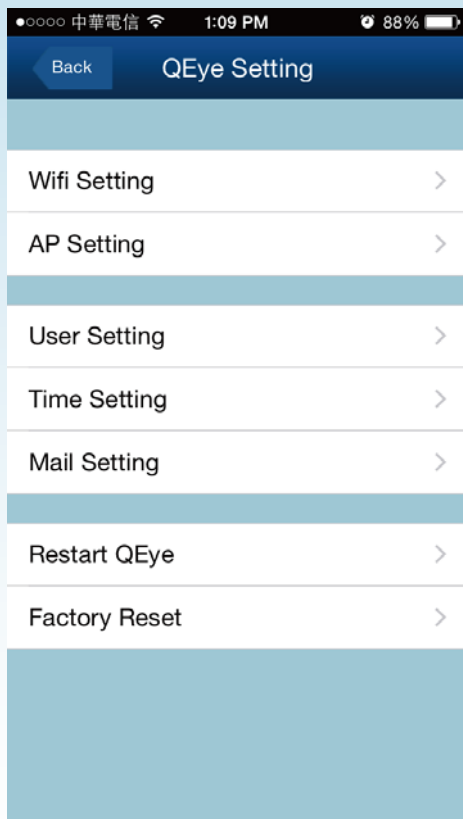


3 User Levels

	Administrator	Operator	Visitor
Function Setting	●		
Fish Feeding	●	●	
Aquarium Viewing	●	●	●


4. Time Setting

I. Tap to go to time setting

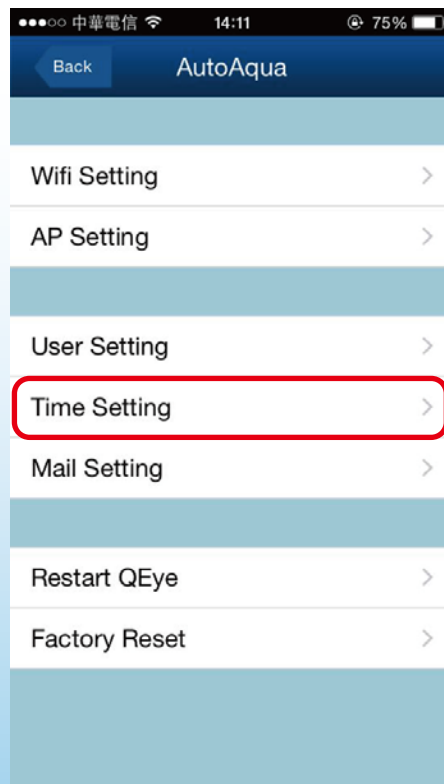


Editing QEye setting

- II. Turn on/off automatic time zone and tap done
(Default setting is on; suggest not to turn it off)

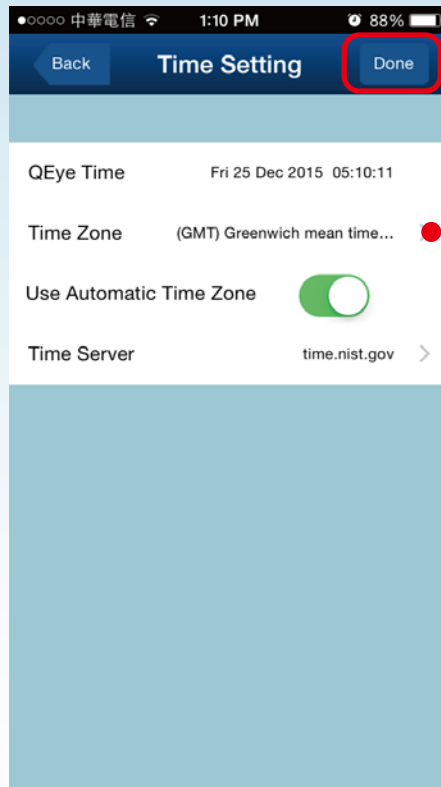


5.Mail Setting

- I. Tap to go to mail setting

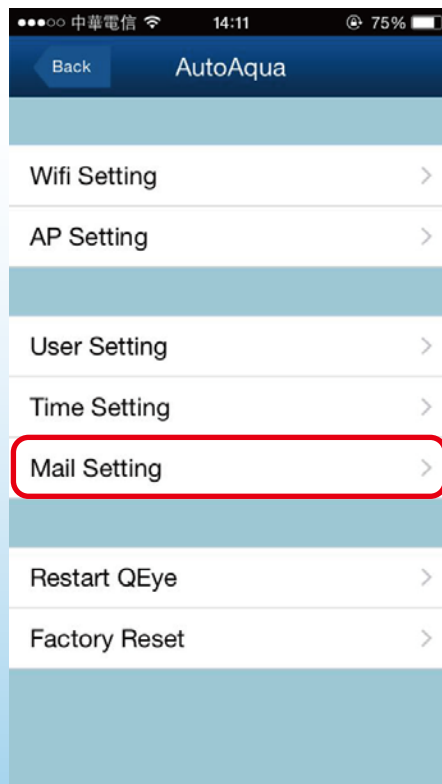

Editing QEye setting

II. Key in receiver e-mail to receive alarm message (4 receivers at most)

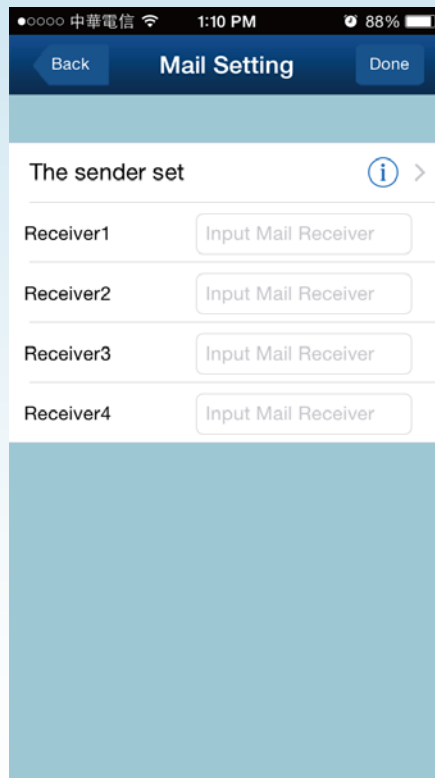


The screenshot shows the 'Mail Setting' screen with a status bar at the top displaying '中華電信', '1:10 PM', and '88%'. The screen has a blue header with 'Back' and 'Done' buttons. Below the header, there is a section titled 'The sender set' with an information icon. Under this section, there are four rows, each labeled 'Receiver1' through 'Receiver4' on the left and an 'Input Mail Receiver' text box on the right.

Alarm message will be sent automatically when food is empty or over shoots limit

III. Tap to see the sender information

* Suggest to use the default sender information

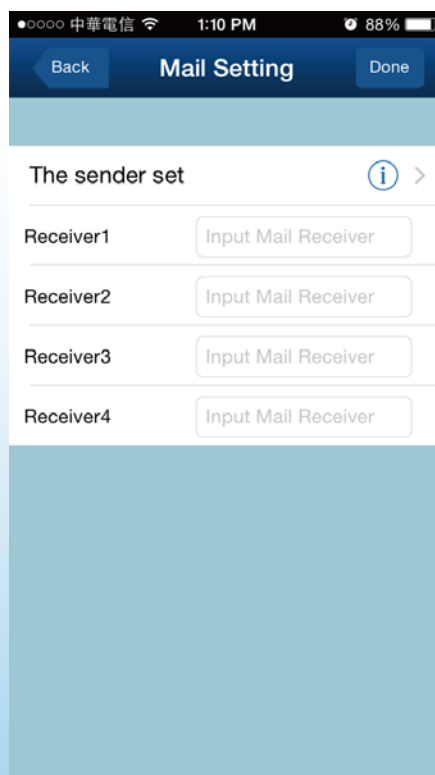

This screenshot is identical to the one above, showing the 'Mail Setting' screen with the 'The sender set' section and four receiver input fields. The information icon next to 'The sender set' is highlighted, indicating it should be tapped to view sender details.


Default Sender Information

- Sender : service@qsmartonline.com
- SMTP Server : mail.qsmartonline.com
- SMTP Port : 25
- SSL : None
- User Name: service@qsmartonline.com

Editing QEye setting


IV. Change sender information

* Strongly suggest "NOT" to change the sender information.
Once you change it, it no longer goes back to the default sender information

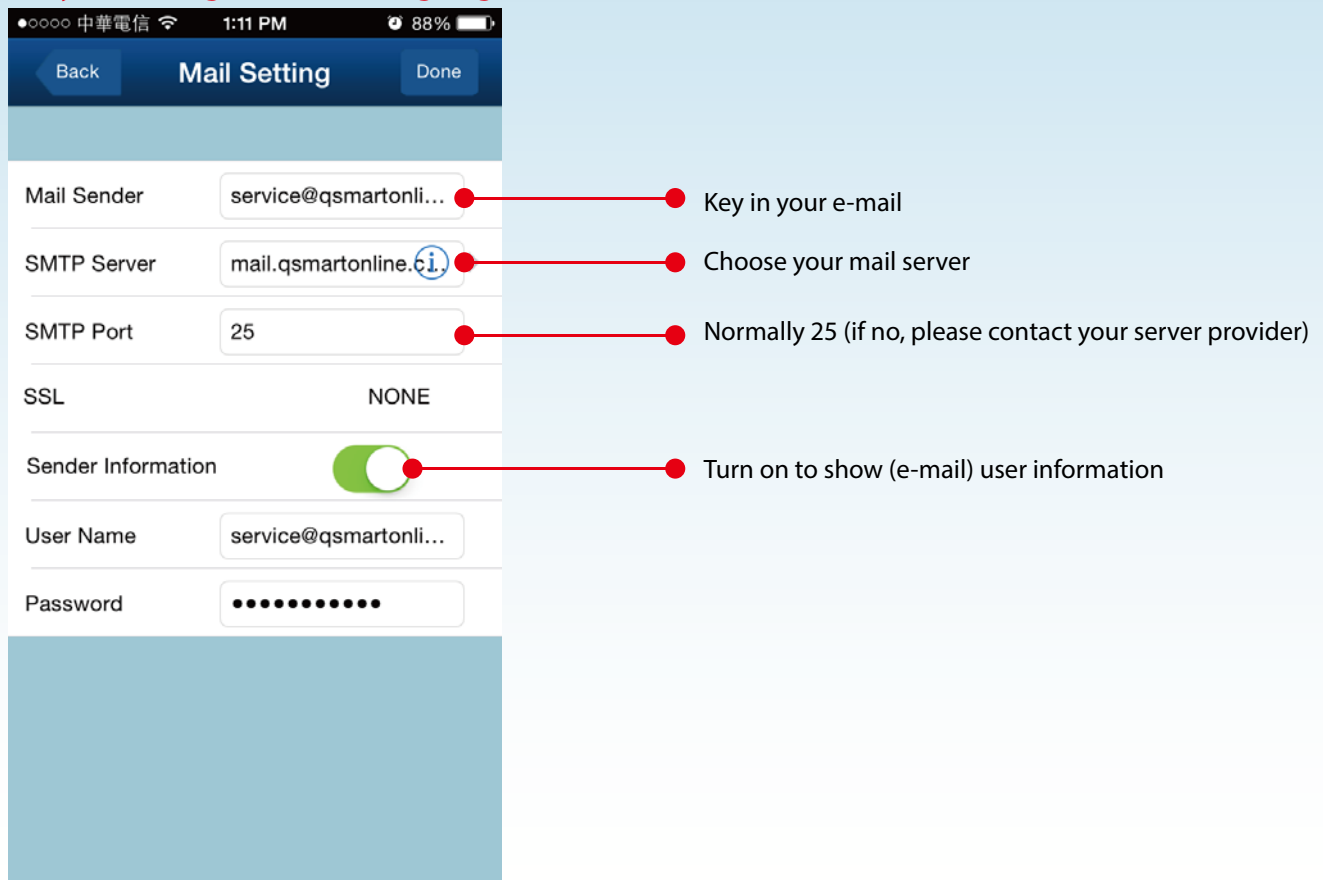

Restart QEye


I. Tap to restart power of QEye

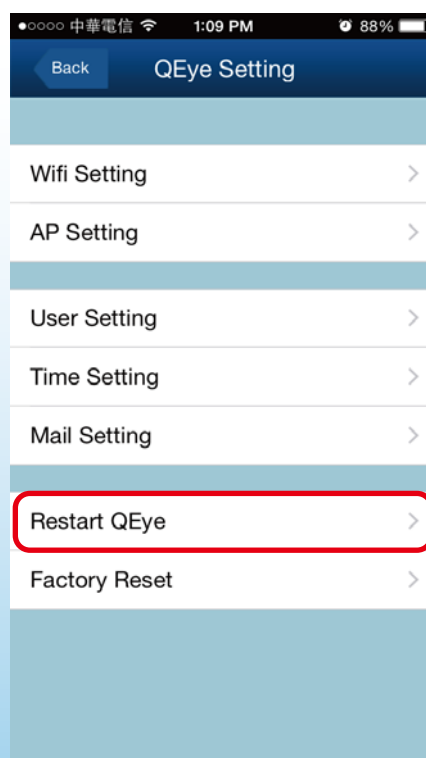

Editing QEye setting

Factory Reset


I. Tap to restore to QEye original factory setting (AP Mode)

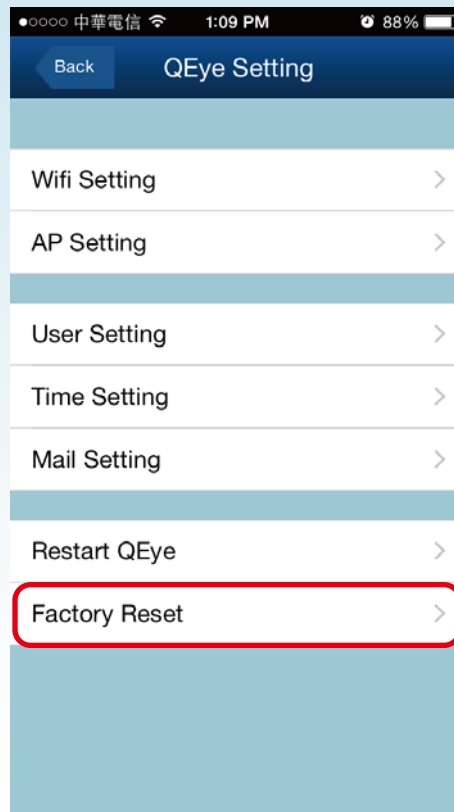

Editing Files

1. Picture File


I. Go back to main menu and tap

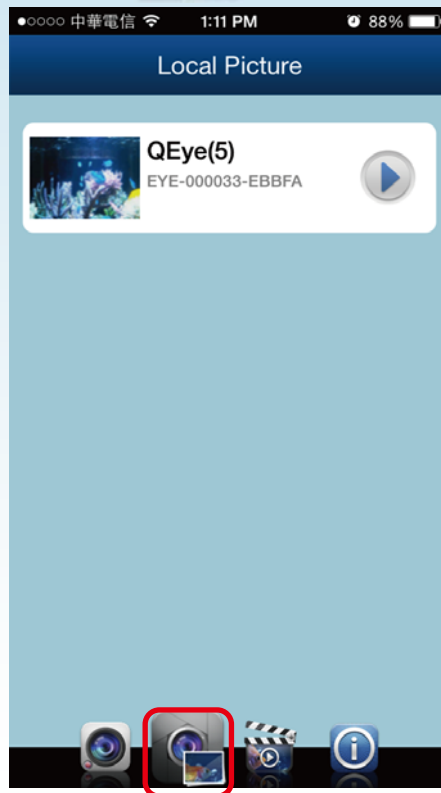

II. Tap



to view the photos

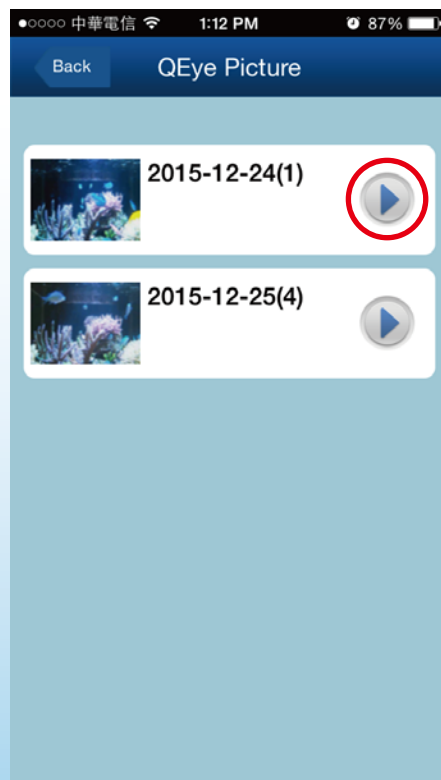


Editing Files


III. Tap



to edit photos

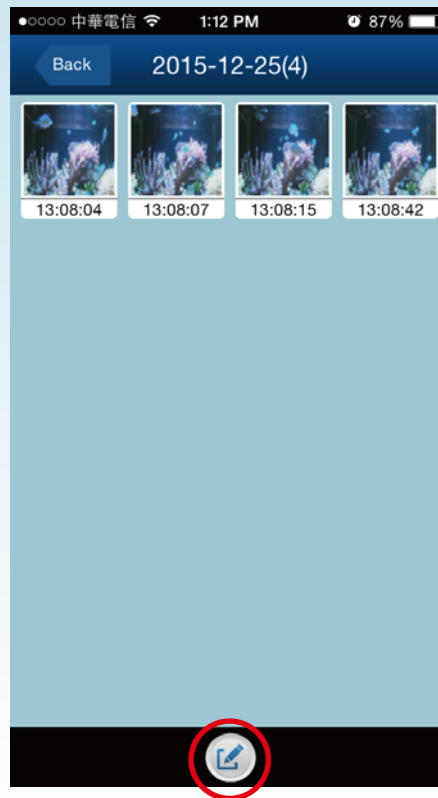

IV. Select photos to edit

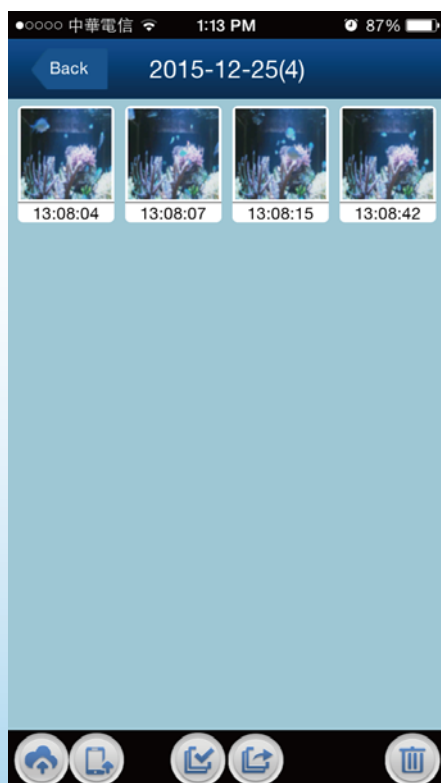

Share



Save image to the album



Select all



Select none




Delete



Editing Files

2.Video File


I. Go back to main menu and tap

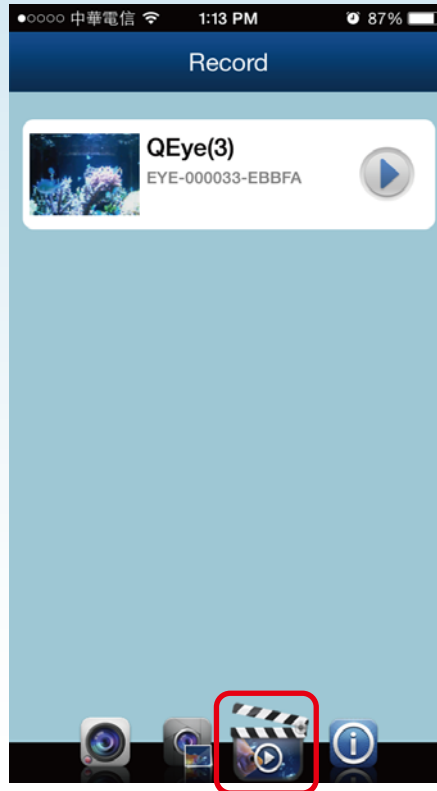

II. Tap



to view the videos

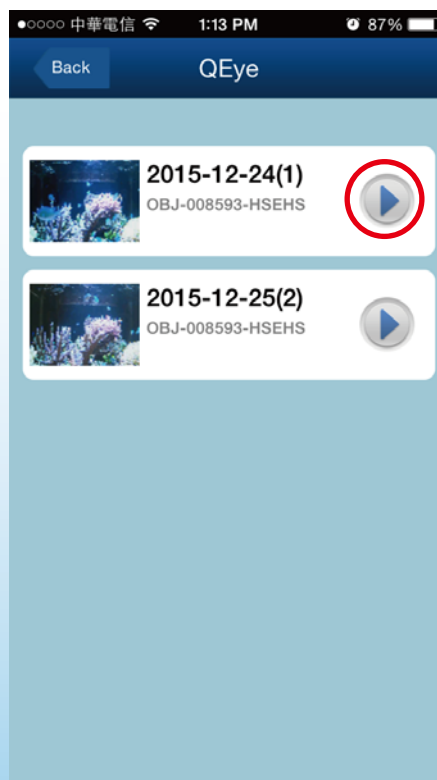


Editing Files


III. Tap



to edit the videos

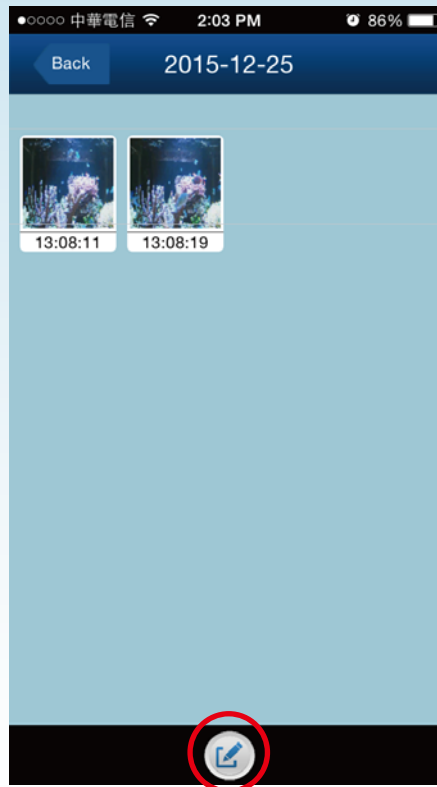

IV. Select videos to edit

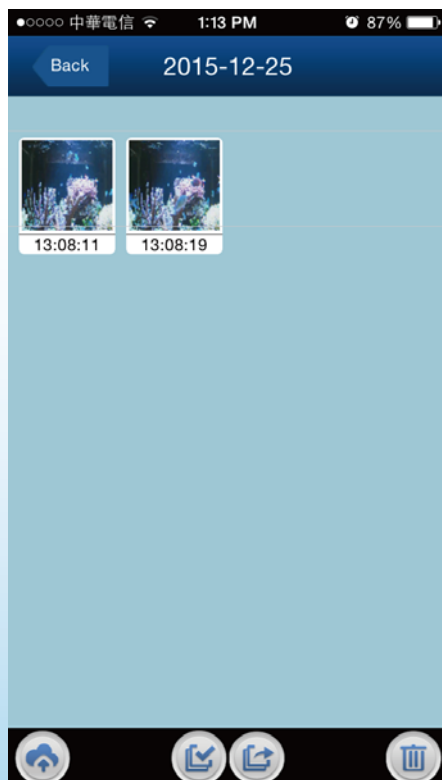

Select all




Select none






Delete

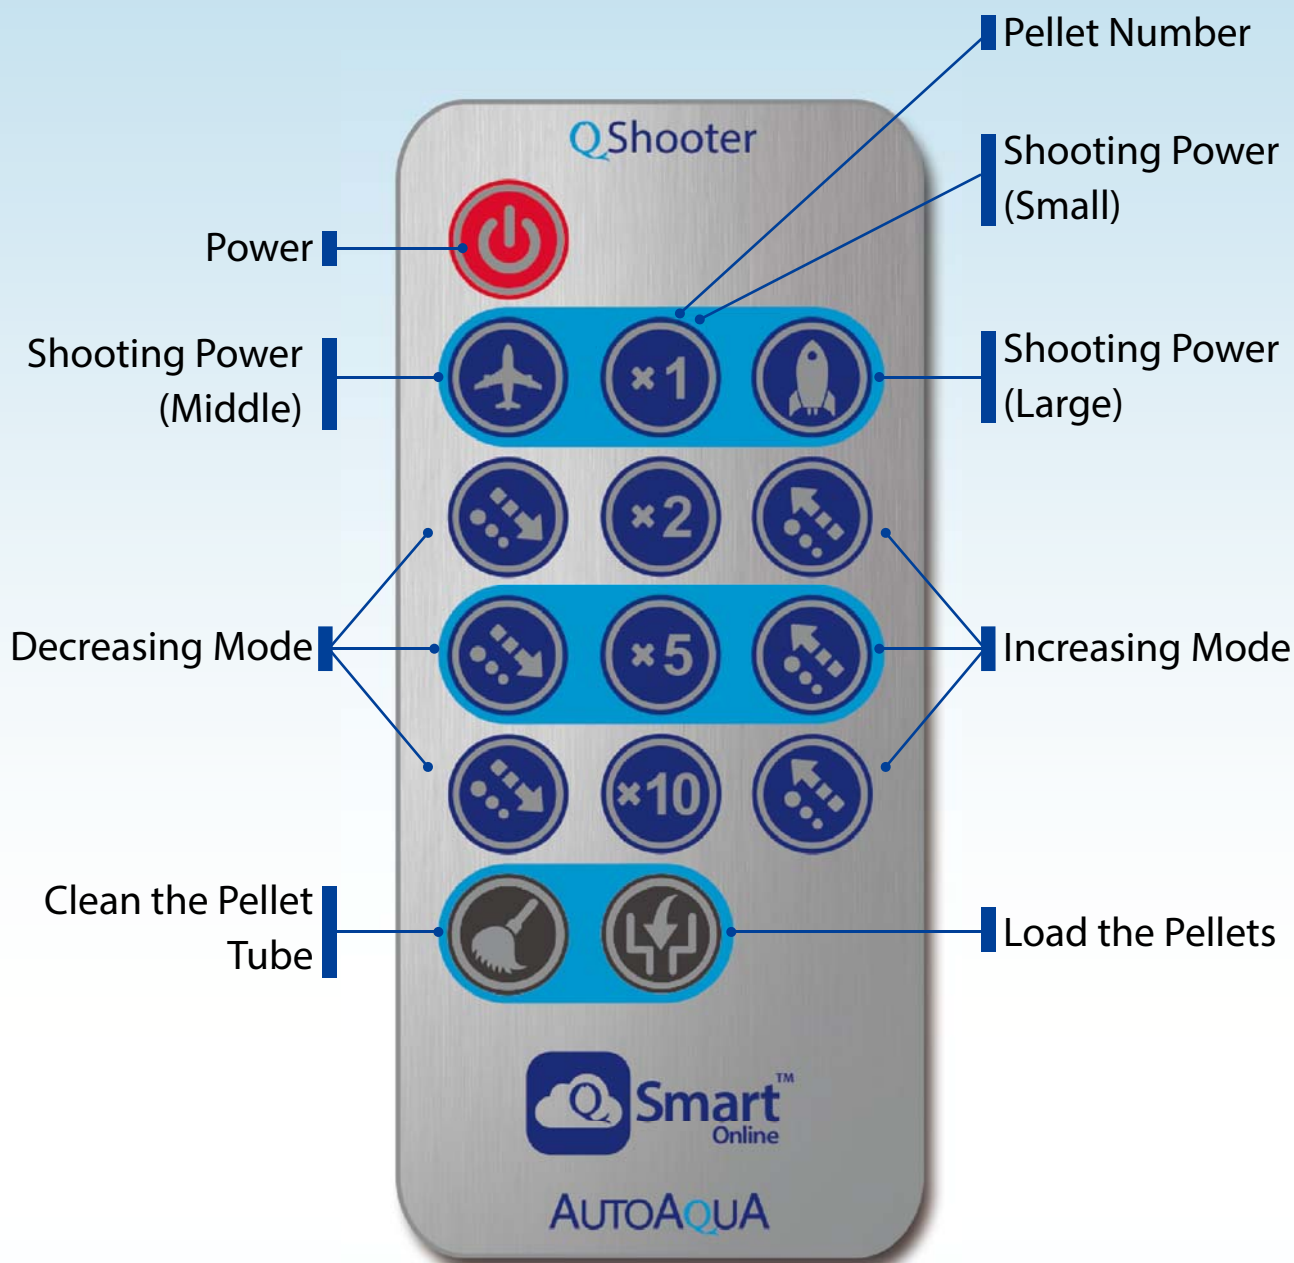

Remote Control



Power	Power Mode	
Weak	Small	
Middle	Middle	
Strong	Large	
Weak to Strong	Increasing Mode	
Strong to Weak	Decreasing Mode	
Random	Random	



SmartTM
Online

qsmartonline.com

QEye & QShooter Combo

User Guide

01/2016 REV.1.0



AUTOAQUA Technologies Co., Ltd.
7F-7., NO.229, Fuxing 2nd Rd., Zhubei City, Hsinchu County, Taiwan
TEL: +886-3-658-6223 / FAX: +886-3-658-6702
E-mail : service@autoaqua.com.tw
www.autoaqua.com.tw